


# Measuring & Ordering WorkSheet




## 1500 ALUMINUM DOOR CANOPY WITH SIDEWINGS

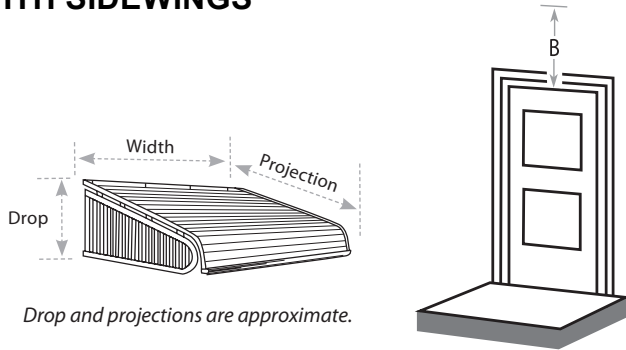

**!** Standard sidewings require 13" of mounting space over door; low-mount sidewings require 6" of mounting space over door.

Canopy Model #	4	5	6	7	8	9	10
Projection	24"	30"	36"	42"	48"	54"	60"
STANDARD SIDES REQUIRE 13" MOUNTING SPACE (B)							
Drop approx.	12"	13"	15"	16"	18"	20"	21"
LOW MOUNT SIDES REQUIRE 6" MOUNTING SPACE (B)							
Drop approx.	10"	11"	12"	12"	13"	13"	14"

*Special orders are not returnable.  
Verify all information before ordering.*

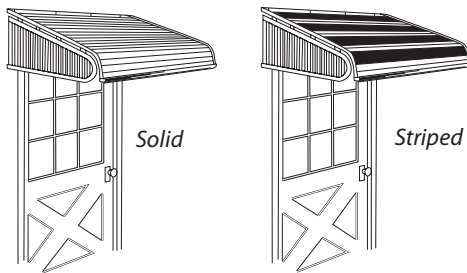

## Measuring and Ordering Information

Complete order information section below using steps 1 through 4.

### STEP 1

**Canopy Model Numbers 4 through 10:** Using the chart provided, choose the appropriate canopy model# that matches the projection that best fits your needs. If mounting over an out swinging door use at least a model # 7.

### STEP 2

**Canopy Width:** Measure outside width of door casing. Add at least 3" - 5" on each side for proper appearance (Be sure light fixtures are not in the way).

### STEP 3

**Canopy Supports:** Before installation, measure from top of door (B) to determine available space for mounting. Standard sides require 13". Low mount sides require 6".

### STEP 4

**Color/Pattern Choice:** Select the color(s) and pattern that best complements your home. The canopy top may be ordered in a solid color or striped pattern. Sidewings available in solid color only.

### ORDER FORM: SERIES 1500 ALUMINUM DOOR CANOPY WITH SIDEWINGS

	Step #1	Step #2	Step #3	Step #4		
Quantity	Canopy Model # 4, 5, 6, 7, 8, 9, or 10	Canopy width in inches	Standard or Low Mount	Canopy Color	Stripe Color	Sidewing Color